




20' STEEL CONDUIT

The Smart Choice for Long Runs

Save Time and Money with 20' EMT and Rigid Metal Conduit

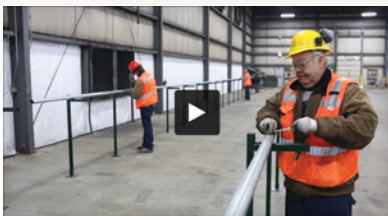

ELECTRICIANS SAY:

“ **When you use Wheatland 20' conduit, you save money for the company and the customer.** ”

Wheatland Tube's 20' conduit takes half as long to couple as 10' conduit and saves you 50% on connection costs. Plus, it helps you install straighter. It's the smart choice for warehouses, big-box retail, airports, data centers and other long-run applications.

Visit wheatland.com/20 to see it in action.

AMERICAN
METAL

 **Wheatland** Tube
A DIVISION OF ZEKELMAN INDUSTRIES

Save Time and Money with 20' EMT and Rigid Metal Conduit

Wheatland Tube's 20' conduit is the smart choice for long runs. Finish your jobs even faster when you install 20' lengths of Wheatland's time-saving electrical products: SmartCompression™ EMT, SmartSet™ EMT, and rigid metal conduit with SpeedCouple.



20' EMT WEIGHTS AND DIMENSIONS

TRADE SIZE	METRIC DESIGNATOR	WEIGHT OF 5 UNIT LENGTHS		OUTSIDE DIAMETER		INSIDE DIAMETER*	
		lbs.	kg	in.	mm	in.	mm
½	16	30	13.6	0.706	17.93	0.622	15.80
¾	21	46	20.9	0.922	23.42	0.824	20.93
1	27	67	30.4	1.163	29.54	1.049	26.64
1¼	35	101	45.8	1.510	38.35	1.380	35.05
1½	41	116	52.6	1.740	44.20	1.610	40.89
2	53	148	67.1	2.197	55.80	2.067	52.50
2½	63	216	98.0	2.875	73.03	2.731	69.37
3	78	263	119.3	3.500	88.90	3.356	85.24
3½	91	349	158.3	4.000	101.60	3.834	97.38
4	103	393	178.3	4.500	114.30	4.334	110.08

* For information only; not a UL-797 requirement.

Applicable tolerances: Length: ± ¼" (± 6.35 mm). Outside diameter: ½ through 2: ± 0.005" (16 through 53: ± 0.13 mm), 2½: ± 0.010" (63: ± 0.25 mm), 3: ± 0.015" (78: ± 0.38 mm), 3½ and 4: ± 0.020" (91 and 103: ± 0.51 mm).

20' RIGID METAL CONDUIT WEIGHTS AND DIMENSIONS

TRADE SIZE	METRIC DESIGNATOR	WEIGHT OF 5 UNIT LENGTHS		NOMINAL OUTSIDE DIAMETER*		NOMINAL INSIDE DIAMETER**	
		lbs.	kg	in.	mm	in.	mm
½	16	82	37.2	0.840	21.34	0.632	16.05
¾	21	109	49.4	1.050	26.67	0.836	21.23
1	27	161	73.0	1.315	33.40	1.063	27.00
1¼	35	218	98.9	1.660	42.16	1.394	35.41
1½	41	263	119.3	1.900	48.26	1.624	41.25
2	53	350	158.8	2.375	60.33	2.083	52.91
2½	63	559	253.6	2.875	73.03	2.489	63.22
3	78	727	329.8	3.500	88.90	3.090	78.49
3½	91	880	399.2	4.000	101.60	3.570	90.68
4	103	1030	467.2	4.500	114.30	4.050	102.87
5	129	1400	635.0	5.563	141.30	5.073	128.85
6	155	1840	834.6	6.625	168.28	6.093	154.76

* 20' available by special order.

** For information only; not a UL-6 or CSA C22.2 No. 45.1-07 requirement. Rigid metal conduit is manufactured to produce a 10' (3.05 m) length of conduit when a standard coupling is attached. Wheatland trade sizes 2 through 4 are UL® Listed for use with directional boring equipment.

Call us at **800.257.8182** or visit **wheatland.com/20**

WEL-121917

